

D 55



FROZEN DICE



Self-contained ice dispenser - Sprayer system
Daily production up to 25 kg

• Position n°




• Application fields

Hotel	●●●●●●●●●●	Fish market	●●●●●●●●●●
Restaurant	●●●●●●●●●●	Supermarket	●●●●●●●●●●
Fast food	●●●●●●●●●●	SPA	●●●●●●●●●●
Bar	●●●●●●●●●●	Medical	●●●●●●●●●●
Disco	●●●●●●●●●●	Industry	●●●●●●●●●●

• Features & Plus

- Full cube, compact and crystalline
- Ice cubes dispenser
- Air Cooling systems
- Electromechanical functioning
- ON-OFF switch
- Internal bin insulation HCFC free
- Easy cleaning thanks to rounded surfaces
- Cleanable antiscaling filter
- Conformity to RoHS directive
- Standard and special voltages
- Model in Tropical Class + 43 ° C
- Undercounter model
- Stainless steel tower available as optional

• Available dice size



• Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	10° C	25
21° C	15° C	22
32° C	21° C	18

2 Years Warranty

subject to limitations

• Certifications available for this model



www.ntfice.it
info@ntfice.it



ntfice.it




D 55



FROZEN DICE



Self-contained ice dispenser - Sprayer system
Daily production up to 25 kg

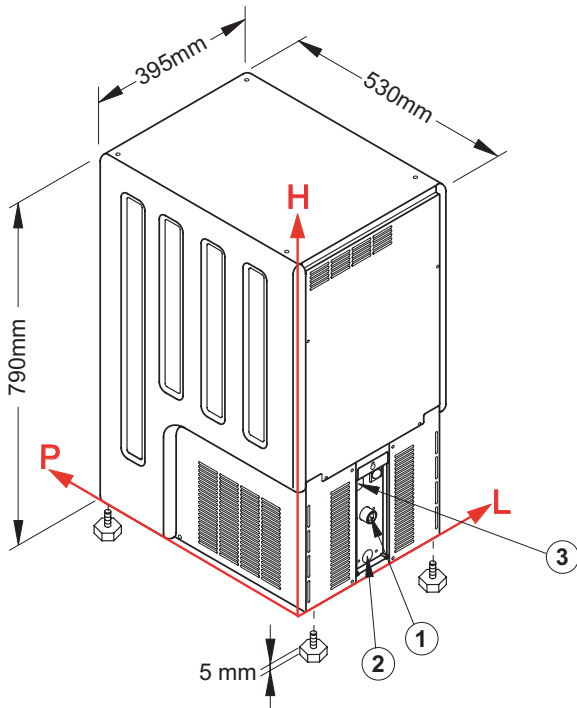

● Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:
191 mm - 136 mm - 3/4"
- ② Water outlet:
197 mm - 36 mm - 24 mm
- ③ Electrical connection:
175 mm - 211 mm

● Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

● Technical information

Production in 24h	22 kg
Store capacity, up to	7 kg
Cooling system	A
Kind of cube	14 g
Refrigerant	R404A - R452A
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	250 W
Fuse	10 A
Water consumption	A: 4,5 l/kg
Delivered ice	1,3 kg/min
Sizes (L-P-H mm)	395 - 530 - 790
Sizes with pack (L-P-H mm)	430 - 580 - 970
Net weight	41 kg
Gross weight	48 kg
Finish	Polyethylene

All the technical information must be considered at the following conditions:

Sizes without feet	Standard Cube (14 g)	Ambient temperature +21° C	Water temperature +15° C	Electrical consumption at +43° C (standard voltage)
Refrigerant R404A				

Models and specifications are subject to change without notice
Rev. 02 - Issued May 2018



www.ntfice.it
info@ntfice.it

