

**SLF 320**  
**R290**



**FROZEN SNOW**



Self-contained ice maker - Granular system  
Daily production up to 173 kg

● Position n°



● Application fields

Hotel	●●●●●●●●●●	Fish market	●●●●●●●●●●
Restaurant	●●●●●●●●●●	Supermarket	●●●●●●●●●●
Fast food	●●●●●●●●●●	SPA	●●●●●●●●●●
Bar	●●●●●●●●●●	Medical	●●●●●●●●●●
Disco	●●●●●●●●●●	Industry	●●●●●●●●●●

● Features & Plus

- Granular ice
- Low consumption (1 liter water / 1 kg ice) - aircooled vers.
- Electromechanical functioning
- External structure AISI 304 Scotch Brite
- Evaporator AISI 304, auger AISI 303 made
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Dust proof water basin
- Automatic water charge
- Easy cleaning thanks to rounded surfaces
- External protective filter, removable, easy to clean
- Removable side panels
- Internal bin insulation HCFC free
- Model in Tropical Class + 43 ° C
- Conformity to RoHS directive
- Adjustable Stainless Steel feet

● Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	7° C	173
21° C	15° C	150
32° C	21° C	137

**2 Years Warranty**

subject to limitations

● Certifications available for this model



[www.ntfice.it](http://www.ntfice.it)  
[info@ntfice.it](mailto:info@ntfice.it)



ntfice.it




# SLF 320 R290



## FROZEN SNOW



Self-contained ice maker - Granular system  
Daily production up to 173 kg

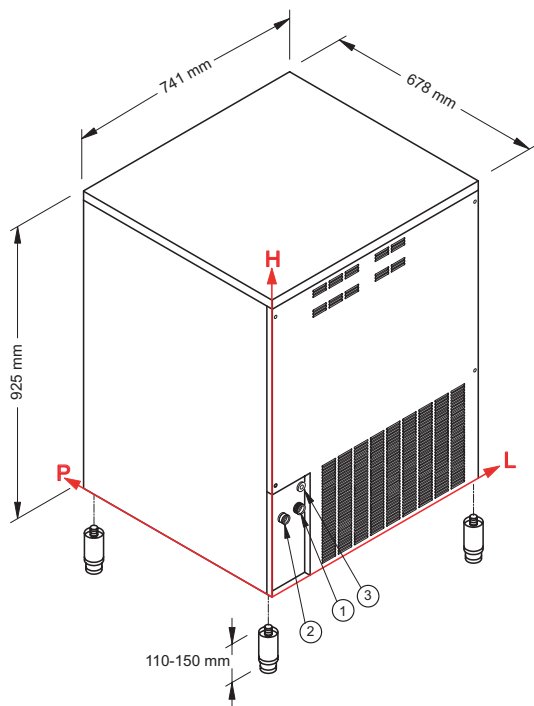

### ● Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:  
120 mm - 230 mm - 3/4"
- ② Water outlet:  
65 mm - 245 mm - 24 mm
- ③ Electrical connection:  
130 mm - 310 mm

### ● Working conditions





- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

### ● Technical information

Production in 24h	150 kg
Store capacity, up to	38 kg
Cooling system	A - W
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	700 W
Fuse	10 A
Water consumption	A: 1 l/kg W: 7 l/kg
Sizes (L-P-H mm)	741 - 678 - 925
Sizes with pack (L-P-H mm)	800 - 750 - 1055
Net weight	85 kg
Gross weight	95 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

			
Sizes without feet	Ambient temperature +21° C	Water temperature +15° C	Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice  
Rev. 00 - Issued March 2018



[www.ntfice.it](http://www.ntfice.it)  
info@ntfice.it



ntfice.it

