

CM 350



FROZEN DICE



Modular ice maker - Sprayer system
Daily production up to 160 kg

• Position n°

• Application fields

Hotel	●●●●●●●●●●	Fish market	●●●●●●●●●●
Restaurant	●●●●●●●●●●	Supermarket	●●●●●●●●●●
Fast food	●●●●●●●●●●	SPA	●●●●●●●●●●
Bar	●●●●●●●●●●	Medical	●●●●●●●●●●
Disco	●●●●●●●●●●	Industry	●●●●●●●●●●




• Features & Plus

- Full cube, compact and crystalline
- External structure AISI 304 Scotch Brite
- Electromechanical functioning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Removable side panels
- ON-OFF switch
- Cabinet insulation HCFC free
- Removable and cleanable air filter
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C

• Available dice size

• Prod. 24h

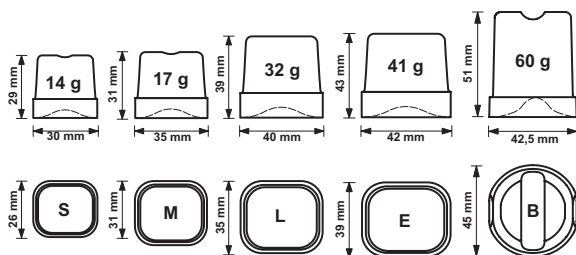

Air temp.	Water temp.	Prod. 24h kg
10° C	10° C	160
21° C	15° C	155
32° C	21° C	132

• Usable Bins

- Bin PE530
- Bin T420
- Bin T830

2 Years Warranty

subject to limitations

• Certifications available for this model



www.ntfice.it
info@ntfice.it



ntfice.it




CM 350



FROZEN DICE



Modular ice maker - Sprayer system
Daily production up to 160 kg

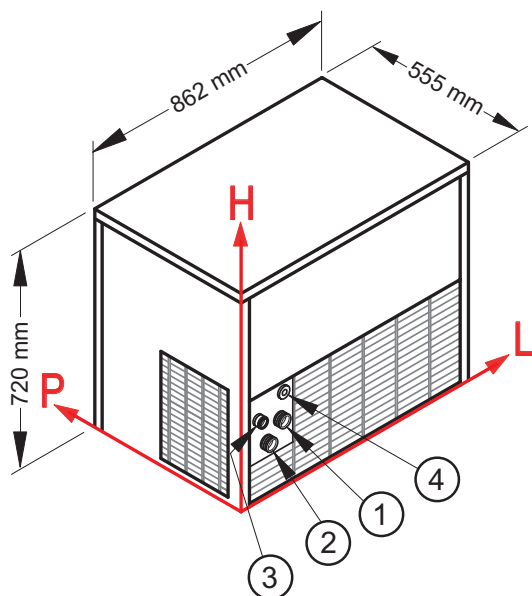

• Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:
126 mm - 284 mm - 3/4"
- ② Condenser water inlet:
94 mm - 234 mm - 3/4"
- ③ Water outlet:
69 mm - 297 mm - 24 mm
- ④ Electrical connection:
140 mm - 355 mm

- ② Only for water cooling systems

• Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

• Technical information

Production in 24h	155 kg
Cooling system	A - W
Kind of cube	14-17-32-41-60 g
Refrigerant	R404A - R452A
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	1400 W
Fuse	16 A
Water consumption	A: 2,6 l/kg W: 13 l/kg
Sizes (L-P-H mm)	862 - 555 - 720
Sizes with pack (L-P-H mm)	945 - 645 - 980
Net weight	118 kg
Gross weight	128 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:



Standard
Cube (17 g)



Ambient
temperature
+21° C



Water
temperature
+15° C



Electrical
consumption
at +43° C
(standard
voltage)

Models and specifications are subject to change without notice
Rev. 02 - Issued September 2019

