






Self-contained ice maker - Paddle system Daily production up to 60 kg

Position n°



Available dice size



Application fields

Restaurant	Supermarket SPA Medical	
Disco	Industry	

Features & Plus

- Hollow cube 20 gr
- Extrernal structure AISI 304 Scotch Brite
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Side grilles for better ventilation
- Removable side panels
- External protective filter, removable, easy to clean
- Water basin materials FDA approved
- Basin tipping safety system
- Automatic water charge
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- Adjustable Stainless Steel feet
- Undercounter model

• Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	10° C	60
21° C	15° C	50
32° C	21° C	41



• Certifications available for this model




























Self-contained ice maker - Paddle system Daily production up to 60 kg

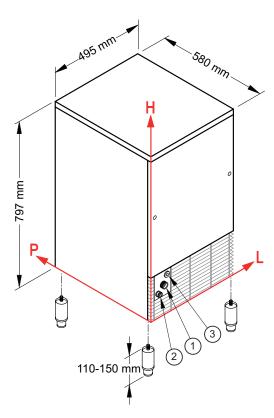

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet: 111 mm - 196 mm - 3/4"
- ② Water outlet: 49 mm - 151 mm - 24 mm
- ③ Electrical connection: 156 mm - 232 mm

Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

• Technical information

Production in 24h	50 kg
Store capacity, up to	20 kg
Cooling system	A - W
Kind of cube	20 g
Refrigerant	R404A - R452A
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	420 W
Fuse	10 A
Water consumption	A: 3,3 l/kg
	W: 10,5 l/kg
Sizes (L-P-H mm)	495 - 580 - 797
Sizes with pack (L-P-H r	mm) 550 - 630 - 990
Net weight	54 kg
Gross weight	62 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:











Sizes without feet

Standard Cube (20 g)

COMPANY

Ambient temperature +21° C Water temperature +15° C Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice Rev. 02 - Issued September 2019





