

• Certifications available for this model



Warranty





C










Self-contained ice maker - Sprayer system Daily production up to 75 kg

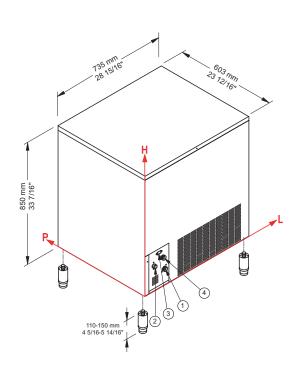

Connections

All measures are referred to the rear bottom-left corner (L-H- \emptyset)

- ① Water inlet: 135 mm - 122 mm - 3/4"
- 2 Water outlet: 62 mm - 182 mm - 24 mm
- ③ Electrical connection: 100 mm - 252 mm
- ④ Condenser water inlet (only W): 124 mm - 208 mm - 3/4"

• Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

Technical information

Production in 24h	68 kg	
Store capacity, up to	40 kg	
Cooling system	A - W	
Kind of cube	14 -17 -32-41 g	
Refrigerant	R452A	
Standard voltage 220-240 V ~ 50 Hz		
Electrical consumption	700 W	
Fuse	10 A	
Water consumption	A: 2,8 l/kg	
	W: 14 l/kg	
Sizes (L-P-H mm)	735 - 603 - 850	
Sizes with pack (L-P-H r	mm) 780 - 640 - 1015	
Net weight	67 kg	
Gross weight	79 kg	
Finish	AISI 304 stainless steel, scotch brite	

All the technical information must be considered at the following conditions:



Sizes without

feet





Water

+15° C





Ambient temperature +21° C temperature



Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice Rev. 03 - Issued September 2020







