






Self-contained ice maker - Sprayer system Daily production up to 42 kg

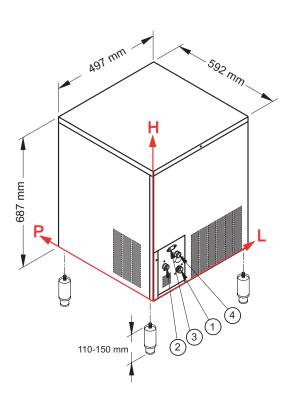

Connections

All measures are referred to the rear bottom-left corner (L-H- \emptyset)

- ① Water inlet: 130 mm - 95 mm - 3/4"
- 2 Water outlet: 56 mm - 155 mm - 24 mm
- ③ Electrical connection: 95 mm - 225 mm
- (4) Condenser water inlet (only W): 119 mm - 181 mm - 3/4"

• Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

• Technical information

Production in 24h	37 kg	
Store capacity, up to	16 kg	
Cooling system	A - W	
Kind of cube	14 -17 -32-41 g	
Refrigerant	R452A	
Standard voltage 220-240 V ~ 50 Hz		
Electrical consumption	380 W	
Fuse	10 A	
Water consumption	A: 3,3 l/kg	
	W: 15 l/kg	
Sizes (L-P-H mm)	497 - 592 - 687	
Sizes with pack (L-P-H r	mm) 550 - 660 - 860	
Net weight	40 kg	
Gross weight	48 kg	
Finish	AISI 304 stainless steel, scotch brite	

All the technical information must be considered at the following conditions:




Sizes without

feet









Water temperature +15° C



(standard voltage)

Models and specifications are subject to change without notice Rev. 03 - Issued July 2020







