





Self-contained ice maker - Granular system Daily production up to 180 kg

Position n°



Application fields

| Restaurant Fast food | Supermarket SPA | |
|-------------------------|--------------------|--|
| Bar | iviedicai | |
| Disco | Industry | |

Features & Plus

- Granular ice
- Low consumption (1 liter water / 1 kg ice) aircooled vers.
- Electromechanical functionning
- Extrernal structure AISI 304 Scotch Brite
- Evaporator AISI 304, auger AISI 303 made
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Dust proof water basin
- Automatic water charge
- Easy cleaning thanks to rounded surfaces
- External protective filter, removable, easy to clean
- Removable side panels
- Internal bin insulation HCFC free
- Model in Tropical Class + 43 ° C
- Conformity to RoHS directive
- Adjustable Stainless Steel feet

• Prod. 24h

| Air temp. | Water temp. | Prod. 24h kg |
|-----------|-------------|--------------|
| 10° C | 10° C | 180 |
| 21° C | 15° C | 155 |
| 32° C | 21° C | 140 |



• Certifications available for this model




























Self-contained ice maker - Granular system Daily production up to 180 kg

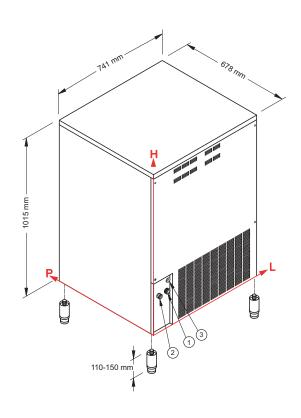

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet: 120 mm - 230 mm - 3/4"
- ② Water outlet: 65 mm - 245 mm - 24 mm
- ③ Electrical connection: 130 mm 310 mm

Working conditions

- Location: Indoor

| | Min | Max |
|----------------------|---------------|---------------|
| Ambient temperature | +10° C | +43° C |
| Water temperature | +3° C | +32° C |
| Voltage | -10% | +10% |
| Water inlet pressure | 1bar (14 psi) | 6bar (84 psi) |

• Technical information

| Production in 24h | 155 kg | |
|--------------------------|--|--|
| Store capacity, up to | 55 kg | |
| Cooling system | A - W | |
| Refrigerant | R404A - R452A | |
| Standard voltage | 220-240 V ~ 50 Hz | |
| Electrical consumption | 650 W | |
| Fuse | 10 A | |
| Water consumption | A: 1 l/kg | |
| | W: 6,4 l/kg | |
| Sizes (L-P-H mm) | 741 - 678 - 1015 | |
| Sizes with pack (L-P-H r | mm) 800 - 750 - 1150 | |
| Net weight | 87kg | |
| Gross weight | 98 kg | |
| Finish | AISI 304 stainless steel, scotch brite | |

All the technical information must be considered at the following conditions:



Sizes without feet



Ambient temperature ter +21° C



Water temperature co +15° C



Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice Rev. 02 - Issued September 2019







