

# SM 1300



## FROZEN ICE



Modular ice maker - Scale system  
Daily production up to 670 kg

### • Position n°



### • Application fields

Hotel	●●●●●●●●●●	Fish market	●●●●●●●●●●
Restaurant	●●●●●●●●●●	Supermarket	●●●●●●●●●●
Fast food	●●●●●●●●●●	SPA	●●●●●●●●●●
Bar	●●●●●●●●●●	Medical	●●●●●●●●●●
Disco	●●●●●●●●●●	Industry	●●●●●●●●●●

### • Features & Plus

- Subcooled flakes (from -5°C to -10°C)
- Low consumption (1 liter water / 1 kg ice) - aircooled vers.
- Electromechanical functioning
- External structure AISI 304 Scotch Brite
- Stainless steel frame
- Evaporator anticorodal alloy made, with rotating knife
- Air Cooling and Water Cooling systems
- Standard and special voltages
- 1 m<sup>3</sup> = 430 kg of ice
- ABS plastic components, FDA approved
- Easy cleaning thanks to rounded surfaces
- Cleanable antiscaling filter
- Removable and cleanable air filter
- Conformity to RoHS directive
- Automatic water charge
- Model in Tropical Class + 43 ° C

### • Usable Bins

- Bin T830
- Bin 1200DD
- RB 280
- DRB 1100
- DRB 2500

### • Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	10° C	670
21° C	15° C	620
32° C	21° C	520

## 2 Years Warranty

subject to limitations

### • Certifications available for this model



[www.ntfice.it](http://www.ntfice.it)  
info@ntfice.it



ntfice.it




# SM 1300



## FROZEN ICE



Modular ice maker - Scale system  
Daily production up to 670 kg

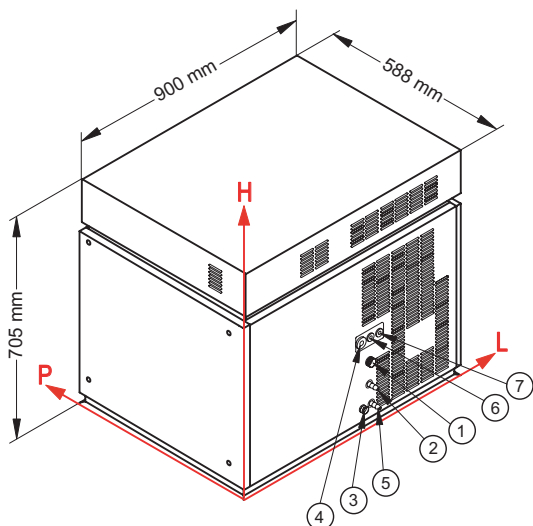

### ● Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:  
463 mm - 187 mm - 3/4"
- ② Condenser water inlet:  
463 mm - 120 mm - 12 mm
- ③ Water outlet:  
428 mm - 60 mm - 24 mm
- ④ Electrical connection:  
434 mm - 257 mm
- ⑤ Condenser water outlet:  
472 mm - 60 mm - 12 mm
- ⑥ Remote connection:  
473 mm - 257 mm
- ⑦ Connection to DRB 1100:  
510 mm - 257 mm

② ⑤ Only for water cooling systems

### ● Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

### ● Technical information

Production in 24h	620 kg
Cooling system	A - W
Refrigerant	R404A - R452A
Standard voltage	400-415 V ~ 3N 50 Hz
Electrical consumption	3000 W
Fuse	16 A
Water consumption	A: 1 l/kg W: 7,4 l/kg
Sizes (L-P-H mm)	900 - 588 - 705
Sizes with pack (L-P-H mm)	965 - 655 - 880
Net weight	151 kg
Gross weight	166 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:



Ambient temperature  
+21° C



Water temperature  
+15° C



Electrical consumption  
at +43° C  
(standard voltage)

Models and specifications are subject to change without notice  
Rev. 02 - Issued September 2019



[www.ntfice.it](http://www.ntfice.it)  
info@ntfice.it



ntfice.it

