














Self-contained ice maker - Paddle system Daily production up to 90 kg

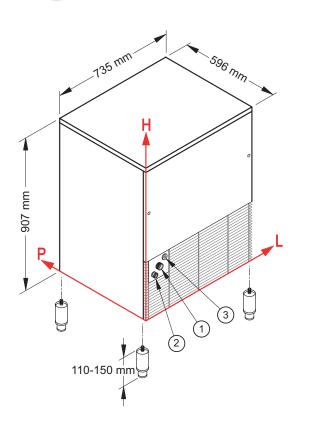

## Connections

IFT 165

**R290** 

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet: 116 mm - 285 mm - 3/4"
- 2 Water outlet: 54 mm - 240 mm - 24 mm
- ③ Electrical connection:161 mm 321 mm

## • Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

## Technical information

Production in 24h	85 kg	
Store capacity, up to	30 kg	
Cooling system	A - W	
Kind of cube	20 g	
Refrigerant	R290	
Standard voltage	220-240 V ~ 50 Hz	
Electrical consumption	500 W	
Fuse	10 A	
Water consumption	A: 4 l/kg - W: 12 l/kg	
Sizes (L-P-H mm)	735 - 596 - 907	
Sizes with pack (L-P-H r	nm) <b>780 - 640 - 1085</b>	
Net weight	75 kg	
Gross weight	87 kg	
Finish	AISI 304 stainless steel, scotch brite	

All the technical information must be considered at the following conditions:



Sizes without

feet









Cube (20 g)

Ambient temperature +21° C



Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice Rev. 01 - Issued September 2019







