






Self-contained ice maker - Paddle system Daily production up to 30 kg

Position n°



Available dice size



Application fields

| Restaurant Fast food Bar | | Supermarket SPA Medical | |
|--------------------------------|--|-------------------------------|--|
|--------------------------------|--|-------------------------------|--|

Features & Plus

- Hollow cube 20 gr
- Extrernal structure AISI 304 Scotch Brite
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Side grilles for better ventilation
- Removable side panels
- External protective filter, removable, easy to clean
- Water basin materials FDA approved
- Basin tipping safety system
- Automatic water charge
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- Undercounter model

• Prod. 24h

| Air temp. | Water temp. | Prod. 24h kg |
|-----------|-------------|--------------|
| 10° C | 7° C | 30 |
| 21° C | 15° C | 20 |
| 22° C | 21° C | 16 |

2 Years Warranty subject to limitations

Certifications available for this model


























Self-contained ice maker - Paddle system Daily production up to 30 kg

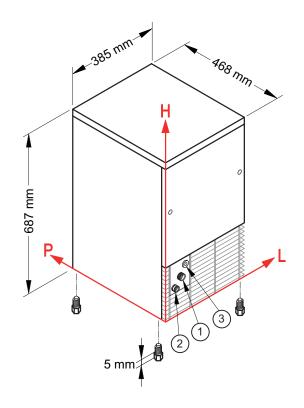

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet: 111 mm - 175 mm - 3/4"
- ② Water outlet: 49 mm - 130 mm - 24 mm
- ③ Electrical connection: 156 mm - 211 mm

Working conditions

- Location: Indoor

| | Min | Max |
|----------------------|---------------|---------------|
| Ambient temperature | +10° C | +43° C |
| Water temperature | +3° C | +32° C |
| Voltage | -10% | +10% |
| Water inlet pressure | 1bar (14 psi) | 6bar (84 psi) |

Technical information

| Production in 24h | 20 kg |
|--|---------------------|
| Store capacity, up to | 8 kg |
| Cooling system | A - W |
| Kind of cube | 20 g |
| Refrigerant | R290 |
| Standard voltage | 220-240 V ~ 50 Hz |
| Electrical consumption | 300 W |
| Fuse | 10 A |
| Water consumption | A: 3 l/kg |
| | W: 17 l/kg |
| Sizes (L-P-H mm) | 385 - 468 - 687 |
| Sizes with pack (L-P-H r | mm) 440 - 520 - 880 |
| Net weight | 38 kg |
| Gross weight | 45 kg |
| Finish AISI 304 stainless steel, scotch br | |

All the technical information must be considered at the following conditions:



Sizes without

feet



Cube (20 g)







Water temperature +15° C



Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice Rev. 01 - Issued September 2019







