





Self-contained ice maker - Granular system Daily production up to 173 kg

#### Position n°



## Application fields

Restaurant Fast food	Supermarket SPA	
Bar	iviedicai	
Disco	Industry	

#### Features & Plus

- Granular ice
- Low consumption (1 liter water / 1 kg ice) aircooled vers.
- Electromechanical functionning
- Extrernal structure AISI 304 Scotch Brite
- Evaporator AISI 304, auger AISI 303 made
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Dust proof water basin
- Automatic water charge
- Easy cleaning thanks to rounded surfaces
- External protective filter, removable, easy to clean
- Removable side panels
- Internal bin insulation HCFC free
- Model in Tropical Class + 43 ° C
- Conformity to RoHS directive
- Adjustable Stainless Steel feet

#### • Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	7° C	173
21° C	15° C	150
32° C	21° C	137



• Certifications available for this model


























Self-contained ice maker - Granular system Daily production up to 173 kg

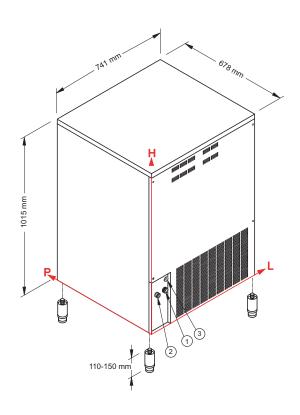

## Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet: 120 mm - 230 mm - 3/4"
- ② Water outlet: 65 mm - 245 mm - 24 mm
- ③ Electrical connection: 130 mm 310 mm

# Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

## • Technical information

Production in 24h	150 kg
Store capacity, up to	55 kg
Cooling system	A - W
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	700 W
Fuse	10 A
Water consumption	A: 1 l/kg
	W: 7 l/kg
Sizes (L-P-H mm)	741 - 678 - 1015
Sizes with pack (L-P-H r	mm) <b>800 - 750 - 1150</b>
Net weight	87kg
Gross weight	98 kg
Finish AISI 304 stainless steel, scotch	

All the technical information must be considered at the following conditions:



Sizes without Ambient feet temperature +21° C



Water temperature +15° C



Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice Rev. 01 - Issued September 2019







